


Figure 3-3 Panel-mounting the Controller

3.3 CONNECTIONS AND WIRING

The rear terminal connections are illustrated in Figure 3-4.

Output 3 is used either as Alarm 1 Output (Relay or SSR only) or Recorder Output (DC only).

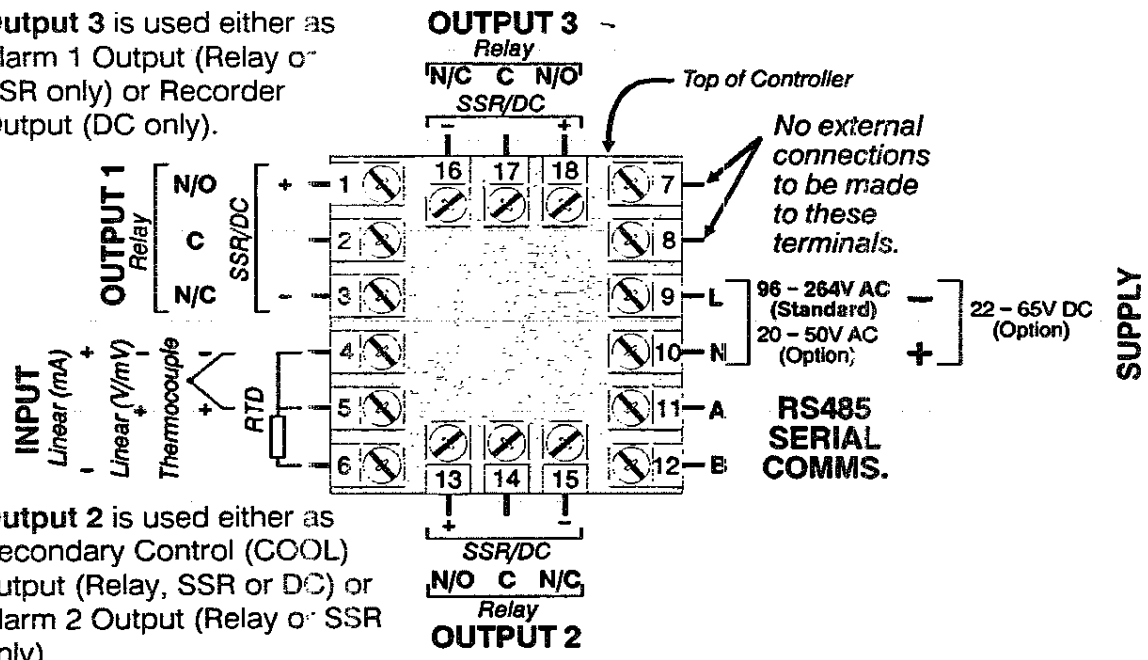

Output 2 is used either as Secondary Control (COOL) output (Relay, SSR or DC) or Alarm 2 Output (Relay or SSR only).

Figure 3-4 Rear Terminal Connections