


3.3 CONNECTIONS AND WIRING

The rear terminal connections are illustrated in Figure 3-4.

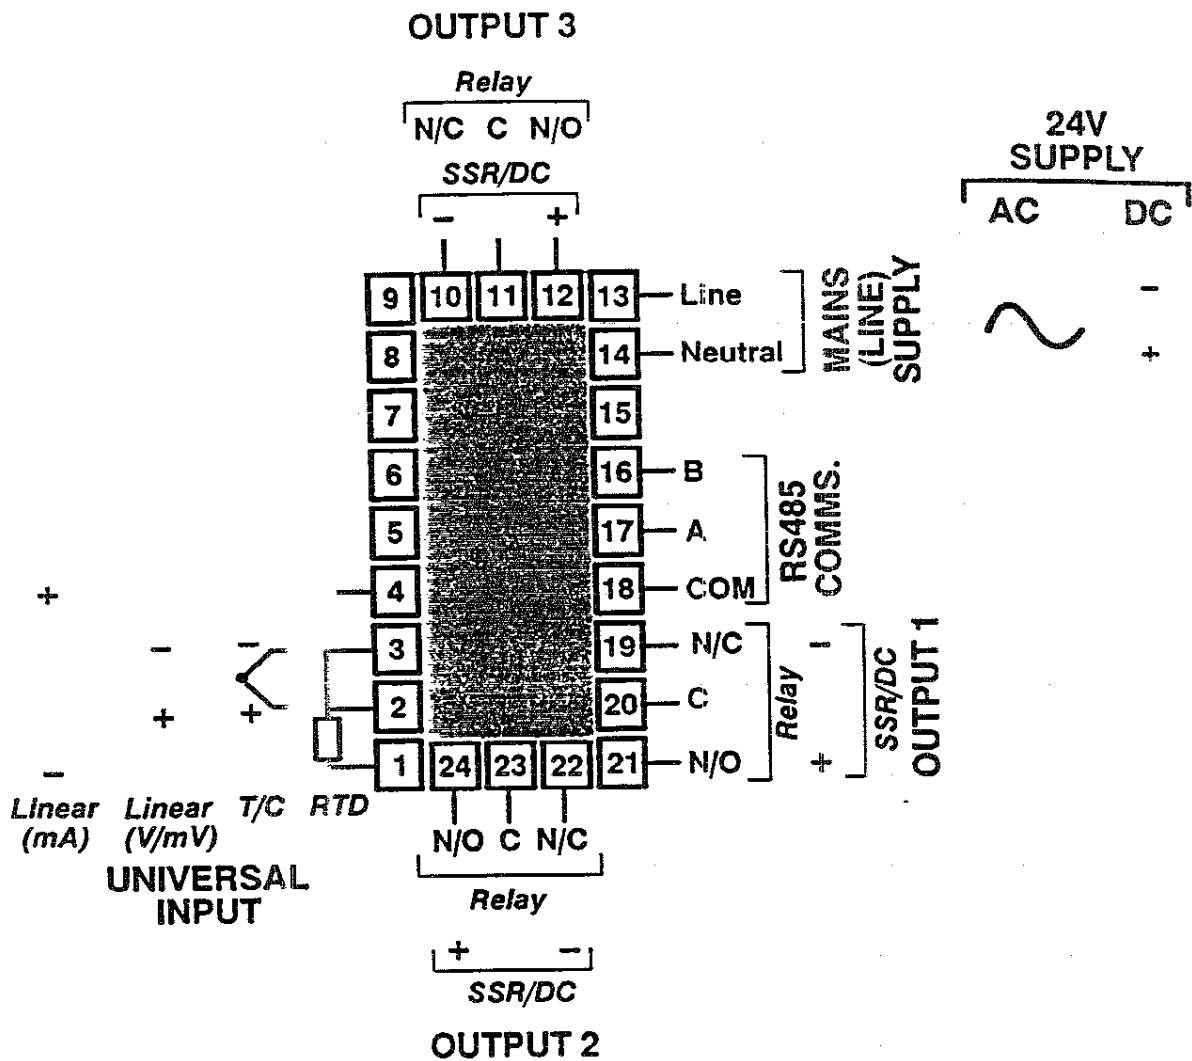

Output 1 is always the primary control (HEAT) output. Its type may be relay, SSR or DC.

Output 2 (option) may be the secondary control (COOL) output (relay, SSR or DC), alarm output (relay or SSR) or a recorder output (DC only) for SP or PV.

Output 3 (option) may be an alarm output (relay or SSR) or a recorder output (DC only) for SP or PV.

Figure 3-4 Rear Terminal Connections