


# UDC 2300 to 2500 Wiring Conversion

**UDC 2300**

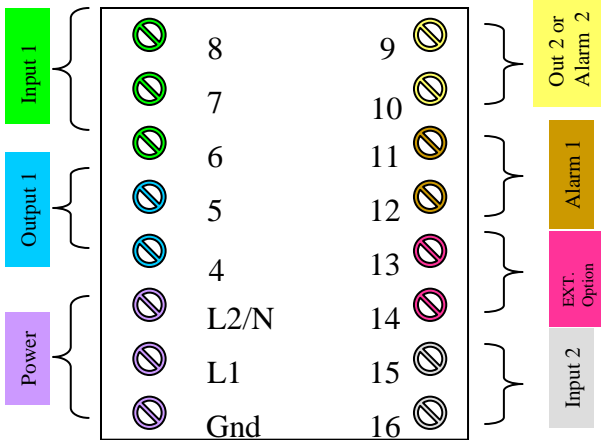

Ground	Ground
L1	L1
L2/N	L2/N
4	20 21 if Current Output
5	21 if jumper is set for N.O. 19 if jumper is set for N.C. 19 if Current Output
6	25
7	27
8	26
9	6 if jumper is set for N.O. 4 if jumper is set for N.C.
10	5
11	9 if jumper is set for N.O. 7 if jumper is set for N.C.
12	8
13	12 if Aux. Output 10 if Digital Input 17 if Communication
14	13 if Aux. Output 11 if Digital Input 18 if Communication
15	23 for Volts 22 for mA
16	24

**UDC 2500**

