


HONEYWELL UDC1200 MICRO-PRO

Universal Digital Controller Product Manual (51-52-25-123-EN)

CAUTION: Installation and configuration should be performed only by personnel who are technically competent to do so. Local Regulations regarding electrical installation & safety must be observed.

Panel-Mounting

The mounting panel must be rigid and may be up to 6.0mm (0.25 inches) thick. The cut-out required for the instrument is shown on the right. Instruments may be mounted side-by-side in a multiple installation for which the cut-out width (for n instruments) is $(48n-4)$ mm or $(1.89n-0.16)$ inches.

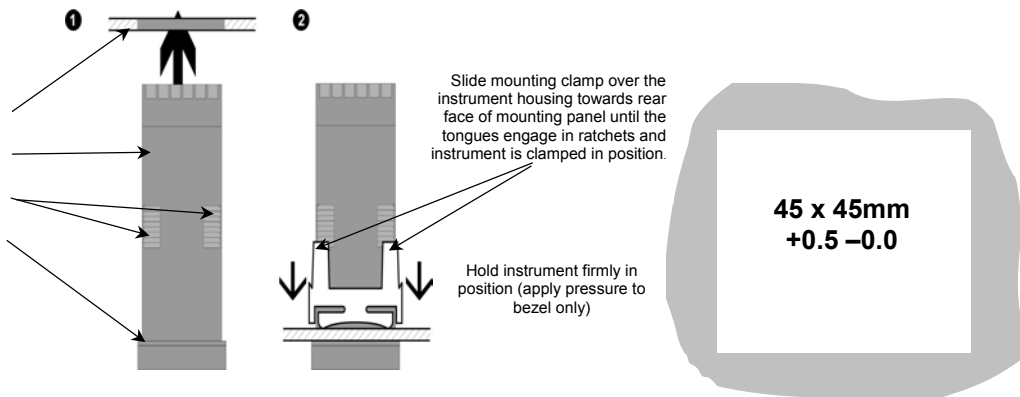

CAUTION: Do not remove the panel gasket; it is a seal against dust and moisture.

2. WIRING

Rear Terminal Wiring

USE COPPER CONDUCTORS (EXCEPT FOR T/C INPUT)
Single Strand wire gauge:
Max 1.2mm (18SWG)



CAUTION: Check information label on housing for correct operating voltage before connecting supply to Power Input
Fuse: 100 – 240V ac – 1amp anti-surge
24/48V ac/dc – 315mA anti-surge

