

RSX Video Recorder - Wiring

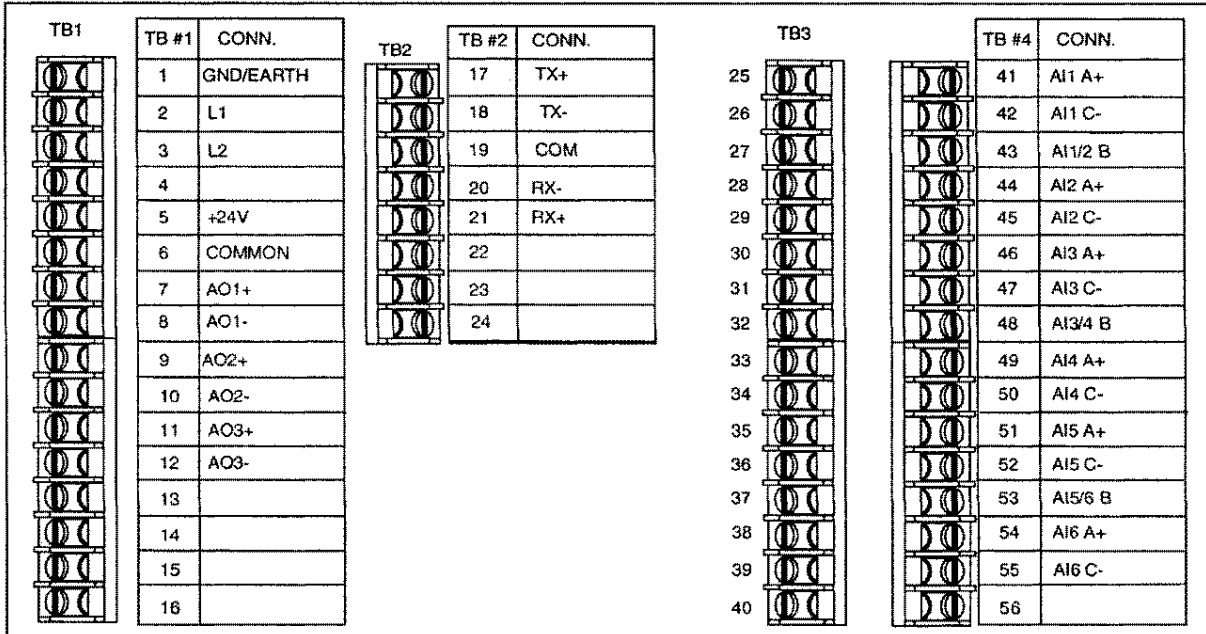


Figure 0-1 Terminal Connections

Table 0-1 Optional Cards for Terminal Board #3

Terminal no.	Contents of cards						
	6 AC Solid State Relays	6 Event Input Relays	6 Mechanical Relays (Form C)	6 DC Solid State Relays	4 Mechanical Relays/ 3 Event Input Relays	4 AC Solid State Relays/ 3 Event Input Relays	4 DC Solid State Relays/ 3 Event Input Relays
25		DI1			DI1	DI1	DI1
26		DI1/2 C	DO6 NC		DI1/2 C	DI1/2 C	DI1/2 C
27	DO6 NO	DI2	DO6 NO	DO6 NO	DI2	DI2	DI2
28	DO5/6 C	DI3 C	DO5/6 C	DO5/6 C	DI3 C	DI2/3 C	DI2/3 C
29		DI3	DO5 NC		DI3	DI3	DI3
30	DO5 NO	DI4	DO5 NO	DO5 NO			
31		DI4/5 C	DO4 NC		DO4 NC		
32	DO4 NO	DI5	DO4 NO	DO4 NO	DO4 NO	DO4 NO	DO4 NO
33	DO3/4 C	DI6 C	DO3/4 C	DO3/4 C	DO3/4 C	DO3/4 C	DO3/4 C
34		DI6	DO3 NC		DO3 NC		
35	DO3 NO		DO3 NO	DO3 NO	DO3 NO	DO3 NO	DO3 NO
36			DO2 NC		DO2 NC		
37	DO2 NO		DO2 NO	DO2 NO	DO2 NO	DO2 NO	DO2 NO
38	DO1/2 C		DO1/2 C	DO1/2 C	DO1/2 C	DO1/2 C	DO1/2 C
39			DO1 NC		DO1 NC		
40	DO1 NO		DO1 NO	DO1 NO	DO1 NO	DO1 NO	DO1 NO