
**SPECIFICATIONS:**

Measuring range:	F <sub>x</sub> = 5000 N F <sub>y</sub> = 5000 N F <sub>z</sub> = 5000 N
Overload capacity:	150% FS
Full scale output:	+/- 5V (AM6501)
Frequency response (expected):	1.0 kHz
System bandwidth:	500 Hz
Sensitivity:	1 N per 1.0 mV of amplifier output
Non-Linearity:	+/- 0.15%
Repeatability:	+/- 0.15%
Hysteresis of rated output:	+/- 0.15%
Temp compensation:	0 - 80 °C
Zero balance:	Push button, automatic
Protection:	IP67
Weight:	750 N (approx.)

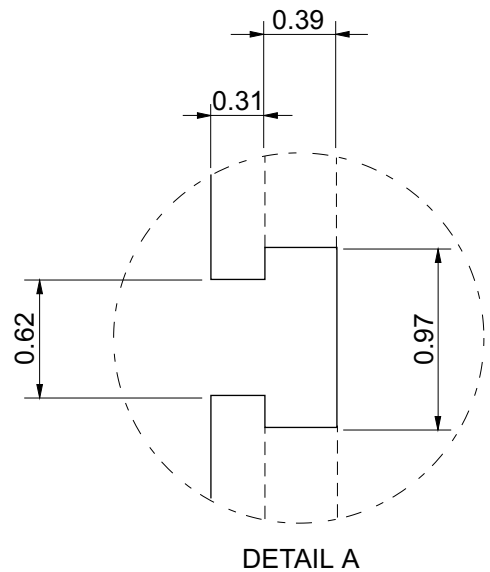

DETAIL A

Dimensions in inches