

Model S

Subminiature, Flush Diaphragm Pressure Transducer



DESCRIPTION

Honeywell's full line of subminiature pressure transducers accurately measure pressure ranges from 100 psi to 15000 psi. These gage-only subminiature pressure transducers have a high natural frequency and utilize a flush diaphragm.

Temperature compensation is accomplished by using temperature-sensitive components located inside the

transducers. These transducers have a small electrical zero balance circuit board which is in the lead wire (approximately 1 in x 0.087 in thick). This balance board does not have to be in the same temperature as the transducers. All transducers have four (4) active bonded strain gages arranged in a Wheatstone-bridge configuration.

FEATURES

- 100 psi to 15000 psi range
- Flush mount design
- No internal dead volume
- High frequency
- mV/V output
- 1 % accuracy
- CE approved

Model S

PERFORMANCE SPECIFICATIONS

Characteristic	Measure
Pressure ranges	
3/8-24 UNF thread	100, 150, 200, 300, 500, 750, 1000, 1500, 2000, 3000, 5000, 7500, 10000, 15000 psig
7/16-20 UNF thread	150, 300, 750, 1500, 7500, 15000 psig
Accuracy ²	1.0 % full scale ⁶
Non-linearity and hysteresis	1.0 % full scale ²
Non-repeatability	±0.15 % full scale
Output	2 mV/V ⁶
Resolution	Infinite

ENVIRONMENTAL SPECIFICATIONS

Characteristic	Measure
Temperature, operating	-54 °C to 149 °C [-65 °F to 300 °F]
Temperature, compensated	16 °C to 71 °C [60 °F to 160 °F]
Temperature effect, zero	0.01 % full scale/°F ⁶
Temperature effect, span	0.02 % reading/°F ⁶

ELECTRICAL SPECIFICATIONS

Characteristic	Measure
Strained gage type	Bonded foil
Excitation (calibration)	5 Vdc
Excitation (acceptable)	Up to 5 Vdc or (Vac)
Insulation resistance	5000 mOhm @ 50 Vdc
Bridge resistance	350 ohm
Shunt calibration data	Included
Electrical termination (std)	Four twisted leads (1.83 m [5 ft]) with external balance board

MECHANICAL SPECIFICATIONS

Characteristic	Measure
Media	Gases, liquids compatible with wetted parts
Overload, safe	50 % over capacity
Overload, burst	400 % full scale
Dead volume	Flush
Wetted parts material	17-4 PH stainless steel
Weight	2 oz
Case material	Stainless steel

RANGE CODES

Range Code	Available ranges
BR	100 psig
CJ	150 psig
CL	200 psig
CP	300 psig
CR	500 psig
CT	750 psig
CV	1000 psig
DJ	1500 psig
DL	2000 psig
DN	3000 psig
DR	5000 psig
DT	7500 psig
DV	10000 psig
EJ	15000 psig


OPTION CODES

Range Code	Many range/option combinations are available in our quick-ship and fast-track manufacture programs. Please see http://sensing.honeywell.com/TMsensor-ship for updated listings.
Pressure ranges	100, 150, 200, 300, 500, 750, 1000, 1500, 2000, 3000, 5000, 7500, 10000, 15000 psig
Temperature compensation	1a. 60 °F to 160 °F 1b. 30 °F to 130 °F 1c. 0 °F to 185 °F 1d. -20 °F to 130 °F 1e. 70 °F to 250 °F 1g. 70 °F to 325 °F 1h. 70 °F to 400 °F 1i. -65 °F to 250 °F
Internal amplifiers	2u. Unamp., mV/V output
Pressure ports	3/8-24 UNF 7/16-20 UNF (BP358)
Electrical termination	Four twisted leads 1.83 m [5 ft] 6d. Microtec DR-4S-4H 4-pin (max 250 °F) ⁴ 6e. Integral cable: Teflon 6h. Integral cable: Silicone 6i. Integral underwater cable: (max 180 °F) ⁴
Special calibration	9a. 10 point (5 up/5 down) 20 % increments @ 70 °F 9b. 20 point (10 up/10 down) 10 % increments @ 70 °F
Wetted diaphragm	10e. Iconel X-750
Shock and vibration	44a. Shock and vibration resistance

Subminiature, Flush Diaphragm Pressure Transducer


INSTALLATION³

T (thread)	A (in) ⁵	B (in)	D (in) +.000/ -.002 in	O-ring	Max torque (for 17-4 PH only)
3/8-24 UNF	0.47	0.30	0.445	#11	300 in-lb
7/16-20 UNF	0.54	0.36	0.504	#12	500 in-lb

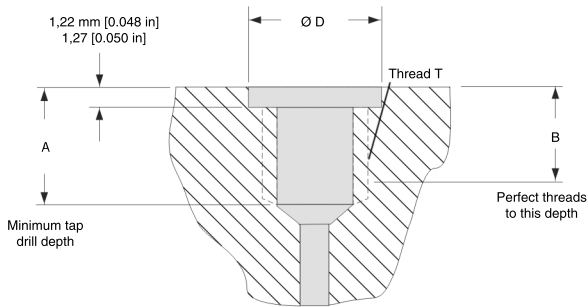

MOUNTING DIMENSIONS AND CHARACTERISTICS

Order code	T (thread)	Ø A	Ø D	B	G	Diaphragm
BP357	3/8-24 UNF	7,87 mm [0.310 in]	12,7 mm [0.50 in]	11,43 mm [0.45 in]	17,53 mm [0.69 in]	Welded
BP358	7/16-20 UNF	9,53 mm [0.375 in]	14,22 mm [0.56 in]	12,7 mm [0.5 in]	19,05 mm [0.75 in]	Welded

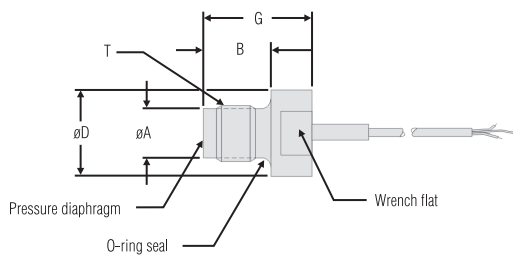


For reference only Transducers have a small electrical balance circuit board (approximately 1.0 in long by 0.38 in wide) located in the lead wire that is two feet from the transducer body.

WIRING CODES

Wire	Cable, unamplified
Red	(+) excitation
Black	(-) excitation
Green	(-) output
White	(+) output

TYPICAL SYSTEM DIAGRAM

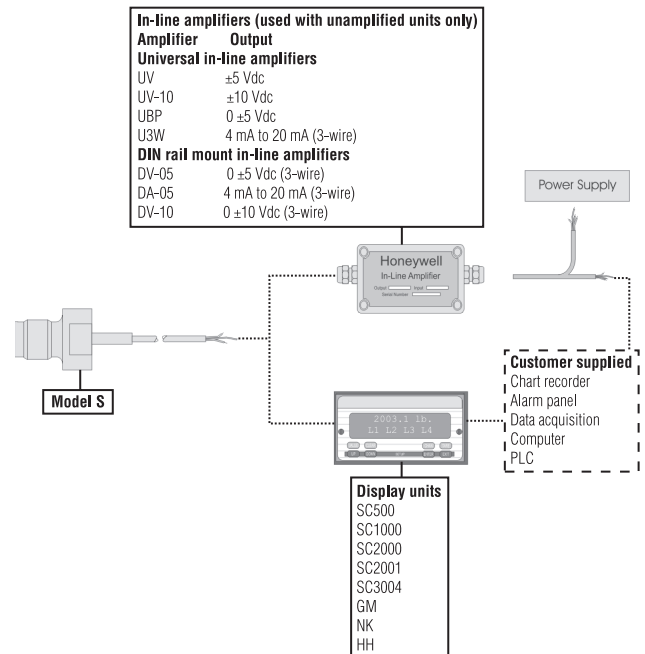

SPECIAL REQUIREMENTS (CONSULT FACTORY)

Have a special requirement? New case pressure, different cable lengths, electrical connectors, or materials? Consult our factory by calling +1 614-850-5000 (800-848-6564). Customization is key to our test and measurement business. Special outputs, wiring codes, and calibrations are all standard to us.

Model S

Subminiature, Flush Diaphragm Pressure Transducer

NOTES

1. Order code subject to change with varying thread, range and electrical termination.
2. Accuracies stated are expected for best-fit straight line for all errors, including linearity, hysteresis & non-repeatability thru zero.
3. Standard "S" type transducers have straight threads and use an O-ring for pressure sealing. To get the best seal with the O-ring on the transducer, the tapped hole should have the dimensions shown on the next page. For normal operating temperatures (-54 °C to 121 °C [-65 °F to 250 °F]) use BUNA-N (black) O-rings. For high temperatures (121 °C to 204 °C [250 °F to 400 °F]) use silicone (red).
4. Only available on certain models, consult factory.
5. "A" dimension changes with different thread options. Consult factory for specifications for different thread options.
6. Consult factory for specifications for ranges less than 100 psi.

Warranty. Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

For more information about Sensing and Control products, visit www.honeywell.com/sensing or call +1-815-235-6847

Email inquiries to info.sc@honeywell.com

WARNING **PERSONAL INJURY**

- DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

WARNING **MISUSE OF DOCUMENTATION**

- The information presented in this catalogue is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

Sensing and Control
Automation and Control Solutions
Honeywell
1985 Douglas Drive North
Golden Valley, MN 55422 USA
+1-815-235-6847
www.honeywell.com/sensing

008604-1-EN IL50 GLO
May 2008
Copyright © 2008 Honeywell International Inc. All rights reserved.

Honeywell