


TAC TIP

UDC 1000/1500 DCP 100

How to correct for “All Decimal Points Illuminated”

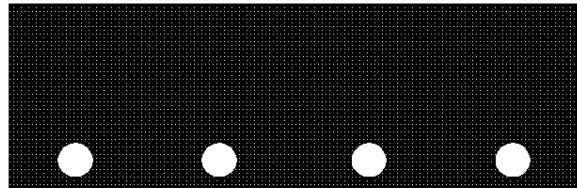

This indicates that one or more of the critical Configuration Mode parameters- typically input range or output use/type - have been altered. As a result of this, all Set Up Mode parameters *have been automatically set to their factory default values/settings.*

To clear this display, simply change the value/ setting of any Set Up Mode parameter (see Below)

1. Hold down the “↑ and the SET UP” key simultaneously:
2. Set the “Uloc” to your Lockout code , then press the Set Up key.(i.e. typical lockout code is 10)
3. Press the Set Up key. FILT will appear in the lower display.
4. Press the “↑” to change the filter to 2.5.
5. Press the Set Up key. Decimal point should disappear.
6. Continue checking/changing the rest of the configuration.